

X0106

N-Channel Enhancement Mode MOSFET

30V(VDS) / ± 20 V(VGS) / 210A(ID)

Rev0.1



Wafer Specification

1. Order Information

Part No.	Description	Gross die / per 8" wafer
X0106	30V(V_{DS}) / $\pm 20V(V_{GS})$ / 210A(I_D) N-Channel Enhancement Mode MOSFET	2,200

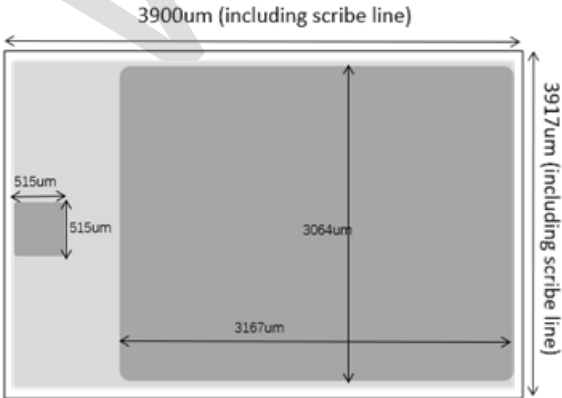
2. Mechanical Data

Nominal Back Metal Composition, Thickness	Ti-Ni-Ag (1kÅ-2kÅ-10kÅ)
Nominal Front Metal Composition, Thickness	AlCu (4μm)
Wafer Diameter	200mm, with 010 notch
Wafer Thickness	125±10μm
Scribe Line Width	60μm
Passivation	SRO+SiN

3. Key Electrical Characteristics of Die (at $T_J = 25^\circ\text{C}$, unless otherwise specified)

Parameter	Description	Min.	Typ.	Max.	Unit	Test Conditions
$V_{(BR)DSS}$	Drain-to-Source Breakdown Voltage	30			V	$V_{GS}=0V$, $I_D=250\mu A$
I_D (Device Ref)	Continuous Drain Current			210	A	$T_J=25^\circ\text{C}$
$R_{DS(on)}(CP)$	Static Drain-to-Source On-Resistance		1.9	2.9	mΩ	$V_{GS}=10V$, $I_D=1A$
			2.4	3.9	mΩ	$V_{GS}=4.5V$, $I_D=1A$
$R_{DS(on)}(FT)$	Static Drain-to-Source On-Resistance		2	3	mΩ	$V_{GS}=10V$, $I_D=15A$
			2.5	4	mΩ	$V_{GS}=4.5V$, $I_D=10A$
$V_{GS(th)}$	Gate Threshold Voltage	1.0	1.3	2	V	$V_{DS}=V_{GS}$, $I_D=250\mu A$
I_{DSS}	Drain-to-Source Leakage Current			1	μA	$V_{DS}=30V$, $V_{GS}=0V$
I_{GSS}	Gate-to-Source Leakage Current			±100	nA	$V_{GS}=\pm 20V$, $V_{DS}=0V$
T_J , T_{STG}	Operating and Storage Temperature	-55°C to 150°C Max				

4. Die Outline

	Die Size: 3900μm × 3197μm (including scribe line)
	Gate: 515μm × 515μm
	For PDFN5X6-8L AL Ribbon packag Suggest Bonding wire: Gate: Cu 2mil*1 Source: AL 80mil*6mil*1 